

# XTS4170 LCD Touch Monitor

POSX

[www.pos-x.com](http://www.pos-x.com)



POINT OF SALE PERFECTED

The 17-inch XTS4170 sets itself apart from its competitors with features such as internal cable management, impact-resistant housing, 2<sup>nd</sup>-generation bump-free 90-degree tilting base, thicker than industry average 2.8mm glass display, and a touch panel rated for over 35 million touches in the same location.

- ◆ Rugged high impact casing
- ◆ Low power consumption
- ◆ Optional integrated MSR and Customer Display
- ◆ Bright, high-resolution LCD display
- ◆ Add additional screen with rear VESA mount
- ◆ 5-wire resistive touch technology
- ◆ Analog RGB(VGA) & 24 pin DVI

## Display

LCD Panel	17" TFT LCD Active Matrix Display
Resolution	1280 x 1024 pixel, 16.2M colors
Contrast Ratio	800 :1
Brightness	300 cd/m2
Pixel Pitch	0.264 mm x 0.264 mm
Pixel Format	1280 horiz. By 1024 vert. Pixels RGB strip arrangement
On Screen Control	Auto Configure, brightness, contrast, phase, H-position, V-position, recall
Display Mode	SVGA 800 x 600, XGA 1024 x 768, 1280 x 1024
Viewing Angle	160°
Color Saturation	72(NTSC %)

## Touch Specs

Technology	5 Wire Resistive
Interface	USB
Touch Active Area	13.25" x 10.75"

## Safety & Regulatory Approvals


FCC, CE, MIC, UL Compliant
Plug and Play DDC 2B Compliance

## Models

XTS4170U	XTS4170U w/ USB Interface
----------	---------------------------

## Accessories

Xm130U	3-Track MSR w/USB interface
Xm130K	3-Track MSR w/ KBW interface
Xp2200	Integrated Customer Display
XPC-VESAMT	Mount for Additional Screen

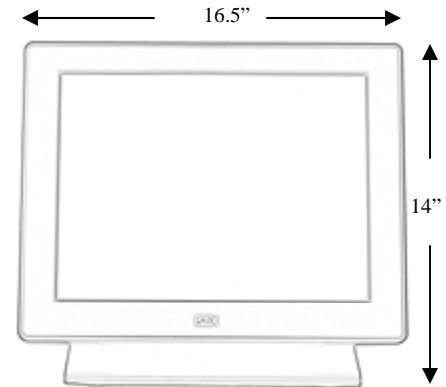

## Power

Adapter Input	100-240 VAC, 50-60Hz
Adapter Output	12 VDC, 3A (C+)

## Environmental

Temperature	32° - 104°F (operating)
	-4° - 140°F (storage)
Humidity	10% - 90% non-condensing

## Physical

Weight	15.5 lbs.
Dimensions	16.5" x 14 x 9.25" (W x H x D)
Color	Black
Back Controls	Power on/off with LED, menu, auto tune, adjustment (+/-)
Stand Style	PED -3 Cable Management Base
Mounting Options	Desktop placement , VESA
Monitor Viewing Angle	160°
PC Video Interface	Analog RGB (VGA) & 24 pin DVI

## Warranty

3-Year Limited Warranty
-------------------------